



FLOORING CATALOGUE

2025 NEW PRODUCTS WITH
NEW DESIGN



GET IN TOUCH WITH US !!

CONTACT NUMBER

WHATSAPP [HTTP://WA.ME/+60 14-632 4833](http://WA.ME/+60 14-632 4833)

OFFICE 03 - 8741 8166

LOCATION

GOOGLE MAP PUBLIC FLOOR SDN BHD

WAZE PUBLIC FLOOR SDN BHD

WAREHOUSE ADDRESS

CHERAS NO D,PT26354-LOT886, JALAN BALAKONG, BATU 11
CHERAS, 43200 SELANGOR

PENANG 16, LORONG PERUSAHAAN SUNGAI LOKAN 2/2, SG LOKAN,
13800 BUTTERWORTH, PULAU PINANG

OPERATION MONDAY - FRIDAY (8.30PM - 5.00PM)
HOUR SATURDAY (8.30PM - 5.00PM)



[CLICK HERE FOR LOCATION](#)

PMFB FLOORING

8MM

PEAK MINERAL FIBER BOARD



PRODUCT STRUCTURE


PMFB Flooring

Peak Mineral Fiberboard (PMFB) Flooring. Durable · Versatile · Reliable Indoors & Outdoors

Peak PMFB flooring is engineered with advanced mineral fiberboard technology and high-pressure manufacturing, delivering both strength and elegance. Designed to perform in diverse environments, it provides reliable solutions for indoor comfort and outdoor durability.

Key Benefits:

Weather-Resistant: Withstands sunlight, rain, and temperature changes, making it suitable for outdoor use. **Waterproof & Moisture-Proof:** Resists swelling, warping, and mold growth, even in humid conditions. **High Strength & Stability:** Strong structure ensures long-lasting performance, even in high-traffic or heavy-load areas. **Stylish Variety:** Available in multiple textures and colors to match residential or commercial design styles.

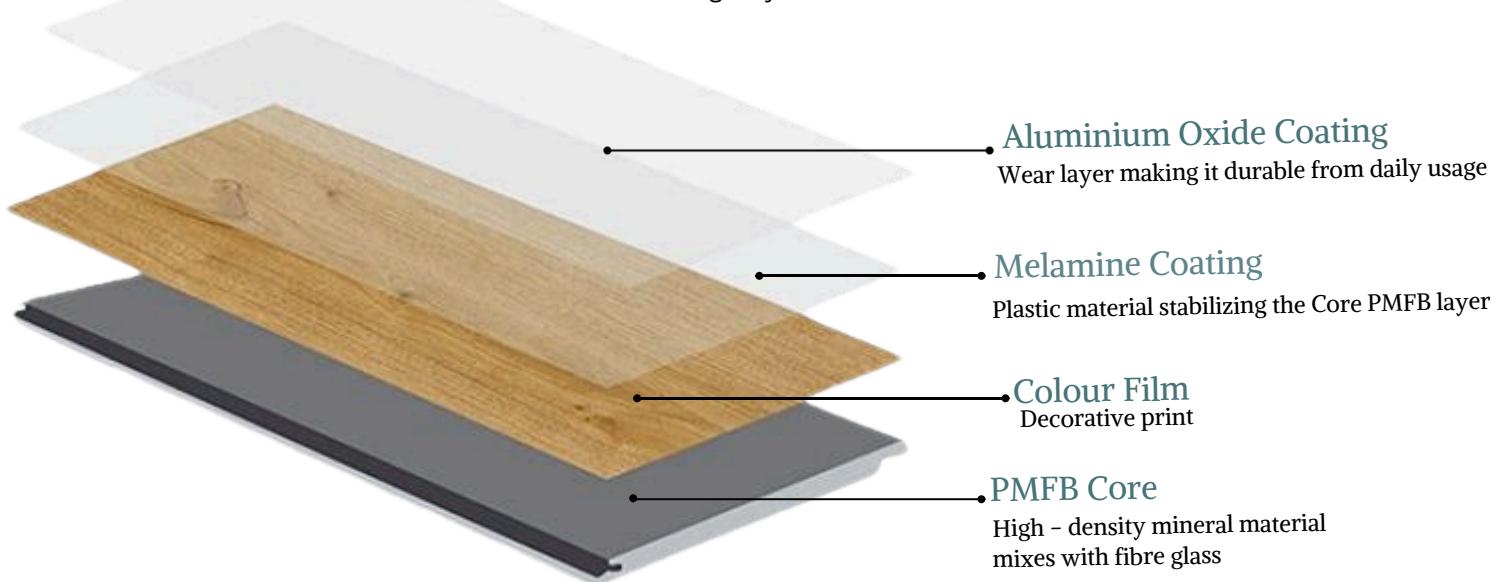

RANDOM EIR

Random EIR flooring creates a more realistic appearance by simulating the natural textures found in real wood. This can contribute to a more authentic and high-quality aesthetic.



BEVEL EDGE

Bevel simulates the appearance of traditional hardwood planks by emphasizing the separation between each board.



EU EcoLabel



WaterProof



FireResistant



Floor Score



Outdoor Weather Resistant



Ultra Texture



Locking System



AC4
Wear Rating



Scratch Resistant



Slip Resistant



SIZE : 1220mm x 196mm

THICKNESS : 8mm

MATERIAL : PEAK MINERAL FIBER BOARD

WEAR LAYER : AC4

PACKING

: 8PCS / 20.6 SF (CTN)

JOINT SYSTEM

: INTERLOCKING

AREA SUITABILITY

: INDOOR RESIDENTIAL & OUTDOOR



8899

8711

8627

8511

8988

LVT CLICK

INTERLOCKING

5MM

“ Where Durability Meets Affordability “



PRODUCT STRUCTURE

LVT CLICK FLOORING

PVC Click LVT Floor refers to a type of flooring made from polyvinyl chloride (PVC) that incorporates a click-lock installation system. Luxury Vinyl Tile (LVT) is a resilient flooring option that emulates the appearance of natural materials such as wood or stone. The click-lock system involves the edges of individual planks or tiles having interlocking mechanisms, enabling them to fit together seamlessly without the need for adhesives.



LOCKING SYSTEM



LVT click



Stain
Resistant



Slip
Resistant



WaterProof Scratch



Scratch
Resistant



Noise
Reduction



Fire
Retardant



Termite
Proof



Impact
Resistant



Easy To
Clean



Affordable



Our product is backed by official test reports and made from 100% legitimate, certified materials.



360° [CLICK HERE TO WATCH VR VIEW](#)



LOCKING SYSTEM

SIZE : 180MM X 1220MM
THICKNESS : 5MM
MATERIAL : DOUBLE UV COATING
WEAR LAYER : 0.5MM

PACKING : 10PCS / 23.65 SF
JOINT SYSTEM : INTERLOCKING
AREA SUITABILITY : INDOOR RESIDENTIAL UP TO HEAVY AREA



5662



5626



5811



5877



5885

SPC

FLOORING

4.5MM & 6MM

STONE PLASTIC COMPOSITE





PRODUCT STRUCTURE

SPC FLOORING & HERRINGBONE FLOORING


Stone Plastic Composite (SPC) flooring is a next-generation flooring innovation designed for durability, aesthetics, and convenience. Built with a rigid core made from limestone powder, polyvinyl chloride (PVC), and stabilizers, SPC flooring's unique composition gives it an unparalleled blend of strength, durability, and aesthetic appeal. Additionally, the advanced engineering behind SPC flooring also results in a product that is eco-friendly.

DURABILITY

SPC flooring durability depends on the thickness of the wear layer applied onto the decorative film. Generally the thicker the wear layer, the more durable the flooring against wear and tear.

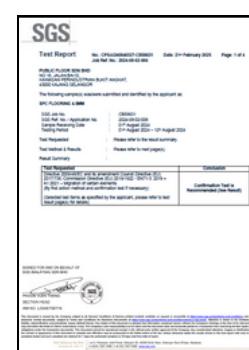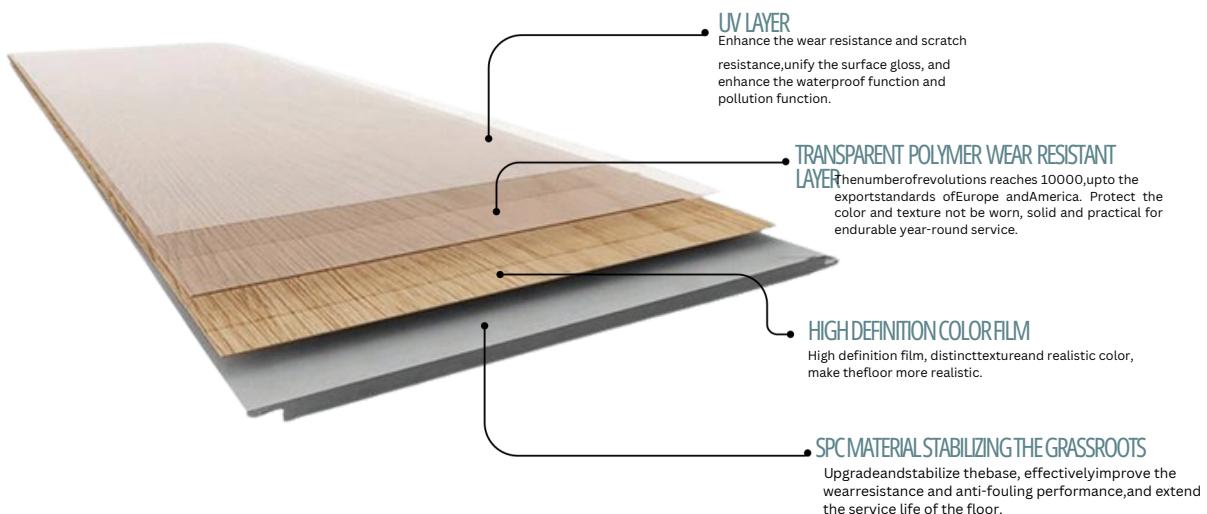

Our product is backed by official test reports and made from 100% legitimate, certified materials.

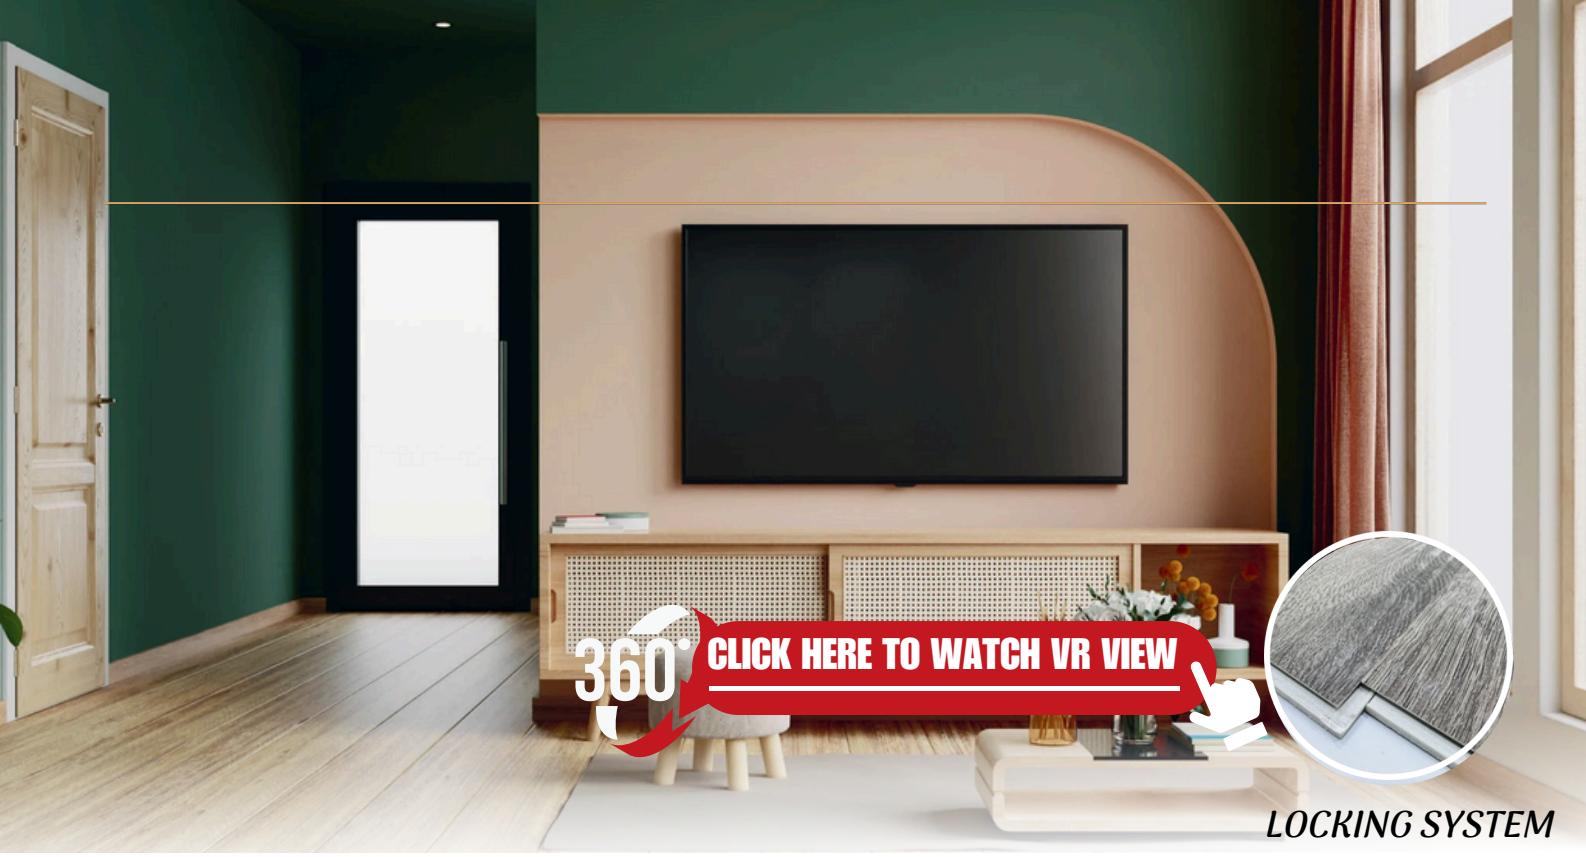

LOCKING SYSTEM

SIZE	: 1220mm x 180mm
THICKNESS	: 4.5MM & 6MM
MATERIAL	: 100% VIRGIN MATERIAL
WEAR LAYER	: 0.3mm
SURFACE TREATMENT	: DOUBLE UV COATING

PACKING	: 4.5MM (11 PCS / 26.2 SF)
	: 6MM (8PCS / 19 SF)
JOINT SYSTEM	: INTERLOCKING
AREA SUITABILITY	: INDOOR



4822	4818	4833	4828	4838	4848	4885	4808	4829	4886
6818	6833	6828	6838	6848	6885				

Code Starts With	Size (mm)
48XX	4.5mm
68XX	6mm

SPC

FLOORING

4.5MM

STONE PLASTIC COMPOSITE

• **HERRINGBONE**





360°

[CLICK HERE TO WATCH VR VIEW](#)




SIZE	: 127mm X 620mm	PACKING	: 18PCS / 15.3 SF	<i>LOCKING SYSTEM</i>	
THICKNESS	: 4.5MM	JOINT SYSTEM	: INTERLOCKING		
MATERIAL	: 100% VIRGIN	AREA SUITABILITY	: INDOOR RESIDENTIAL		
WEAR LAYER	: 0.3 MM				
SURFACE TREATMENT		: DOUBLE UV COATING			



4885



4828



4838

VINYLKOREA

3MM


“Where Durability Meets Affordability”



PRODUCT STRUCTURE


VINYL FLOORING

If you're looking for a cost-effective and stylish flooring solution for your indoor spaces, look no further than our 3mm Vinyl Flooring. With its beautiful wood texture design, this flooring option creates a modern and classy look in your commercial office, hotel. Vinyl flooring is designed for high-traffic areas, offering easy replacement and maintenance to keep your floor looking its best.

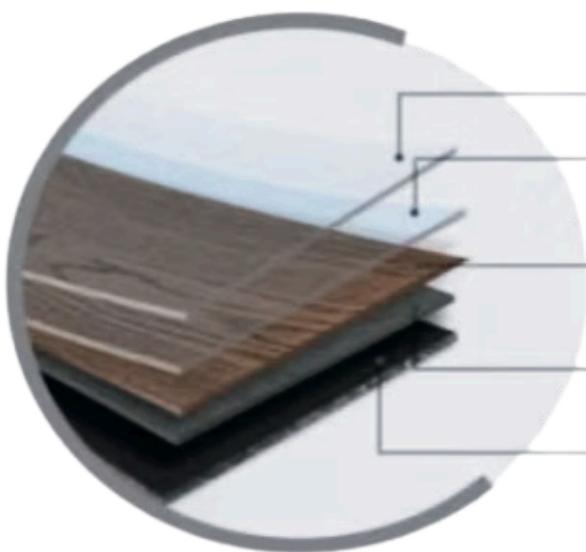

- UV COATING LAYER
- WEAR LAYER
- DECOR FILM
- DOUBLE BASE LAYER
- BALANCE LAYER



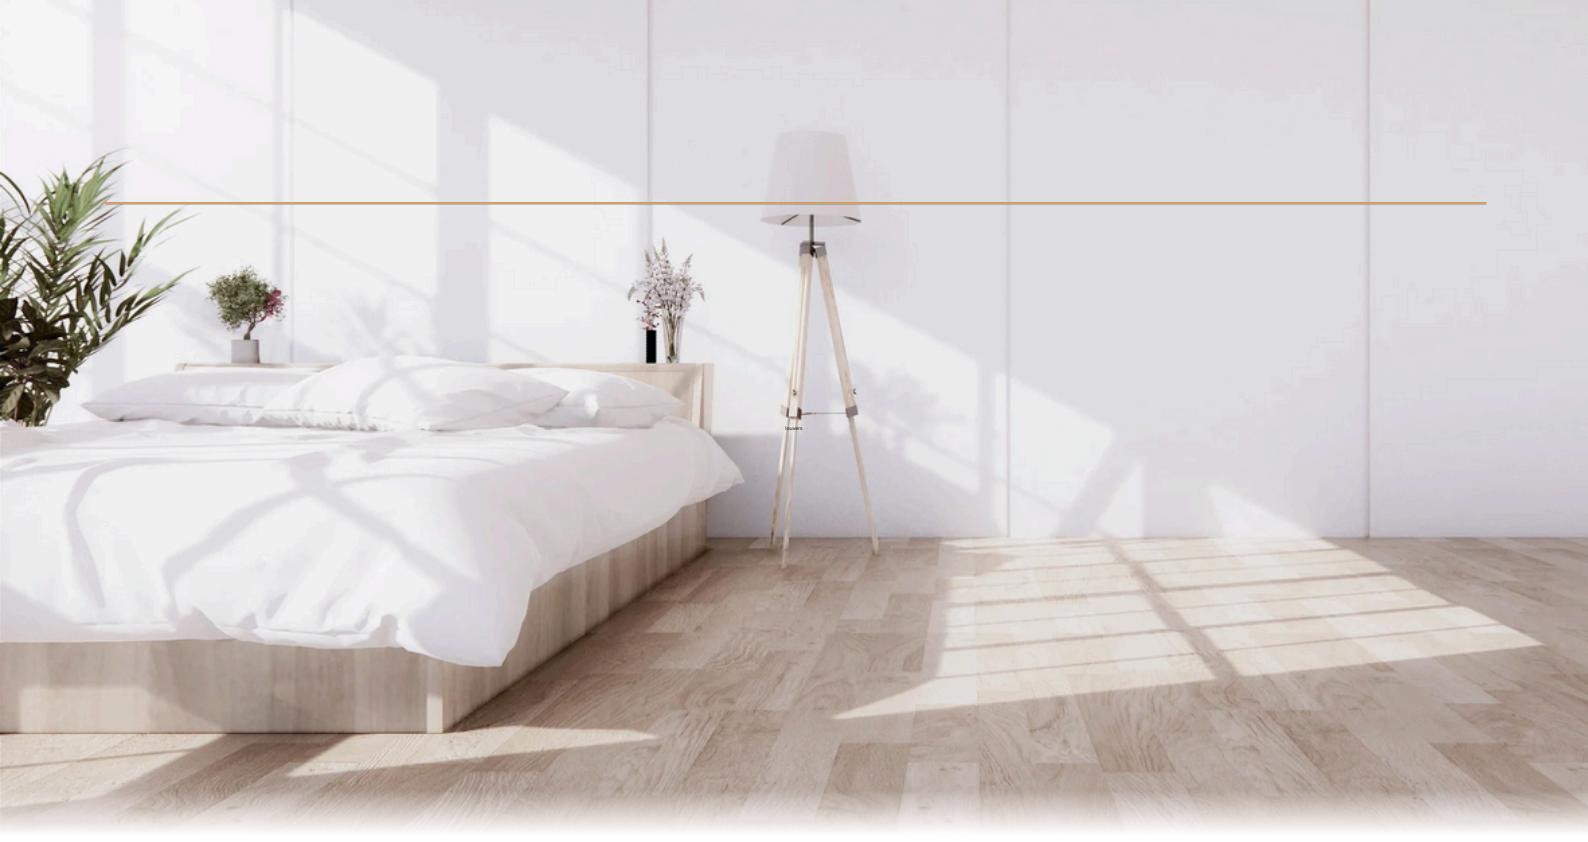

SIZE : 180MM X 920MM

THICKNESS : 3MM

MATERIAL : UV COATING

WEAR LAYER : 0.1MM

PACKING : 20 PCS / 53.47 SF

AREA SUITABILITY : COMMERCIAL OFFICE & HOTEL



LV - 902

LV - 901

LV - 903

LV - 907

LV - 904

LV - 906

LV - 905

LV - 908

LV - 909

LV - 910

VINYLSQUARE

3MM


“Where Durability Meets Affordability”



PRODUCT STRUCTURE

VINYL SQUARE

If you're looking for a cost-effective and stylish flooring solution for your indoor spaces, look no further than our 3mm Vinyl Flooring. With its beautiful wood texture design, this flooring option creates a modern and classy look in your commercial office, hotel. Vinyl flooring is designed for high-traffic areas, offering easy replacement and maintenance to keep your floor looking its best.

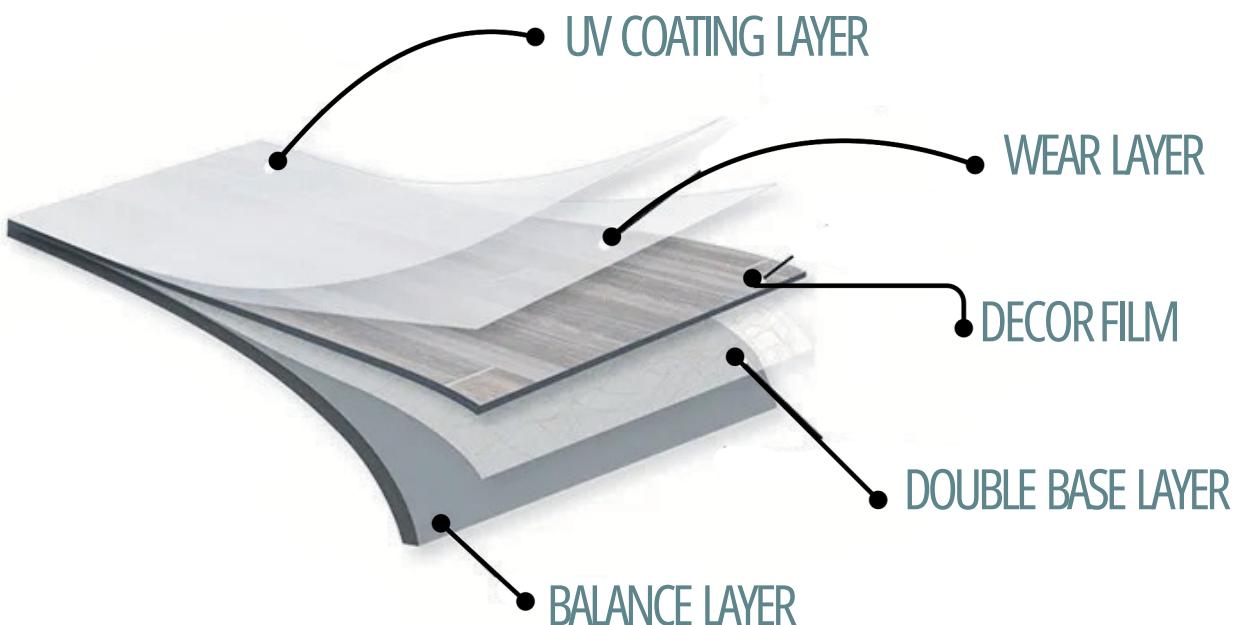



SIZE : 600MM X 600MM

THICKNESS : 3MM

MATERIAL : UV COATING

WEAR LAYER : 0.1MM

PACKING : 16 PCS / 35.7 SF

AREA SUITABILITY : COMMERCIAL OFFICE & HOTEL




LV - 805



LV - 801




LV - 803

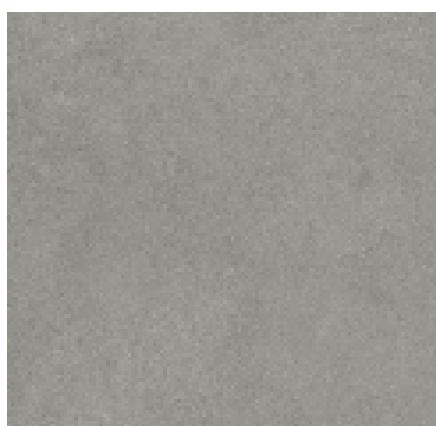

LV - 804



LV - 805

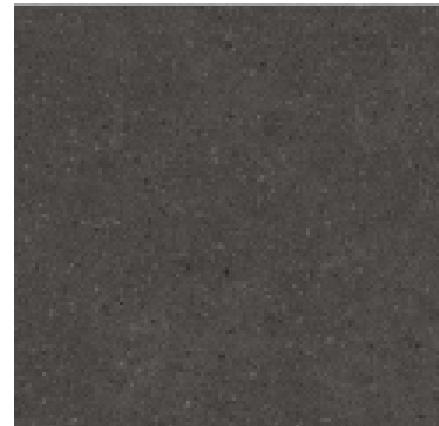

LV - 802

WPC

Outdoor Decking

“Built for Nature, Designed for Comfort”

PRODUCT STRUCTURE

Wood Plastic Composite (WPC) decking is an outdoor flooring solution that combines recycled wood fibers and polymer materials. Unlike natural wood, WPC is completely waterproof, resistant to fading, and requires minimal maintenance. Its anti-slip surface ensures safety even when wet, making it ideal for poolside, balconies, and outdoor patios. Available in hollow and solid options, WPC decking offers long-lasting performance with the natural look of timber.

Available Colors:

- Dark Brown
- Coffee




Type	Size	Length
Hollow Decking	25 x 140mm	3000mm
Solid Decking	25 x 140mm	3000mm
Decking Profile	50 x 5mm	3000mm

PRODUCT EXCELLENCE

- FLOORING ACCESSORIES
- SELF - LEVELLING
- PRODUCT SCORE



FLOORING ACCESSORIES

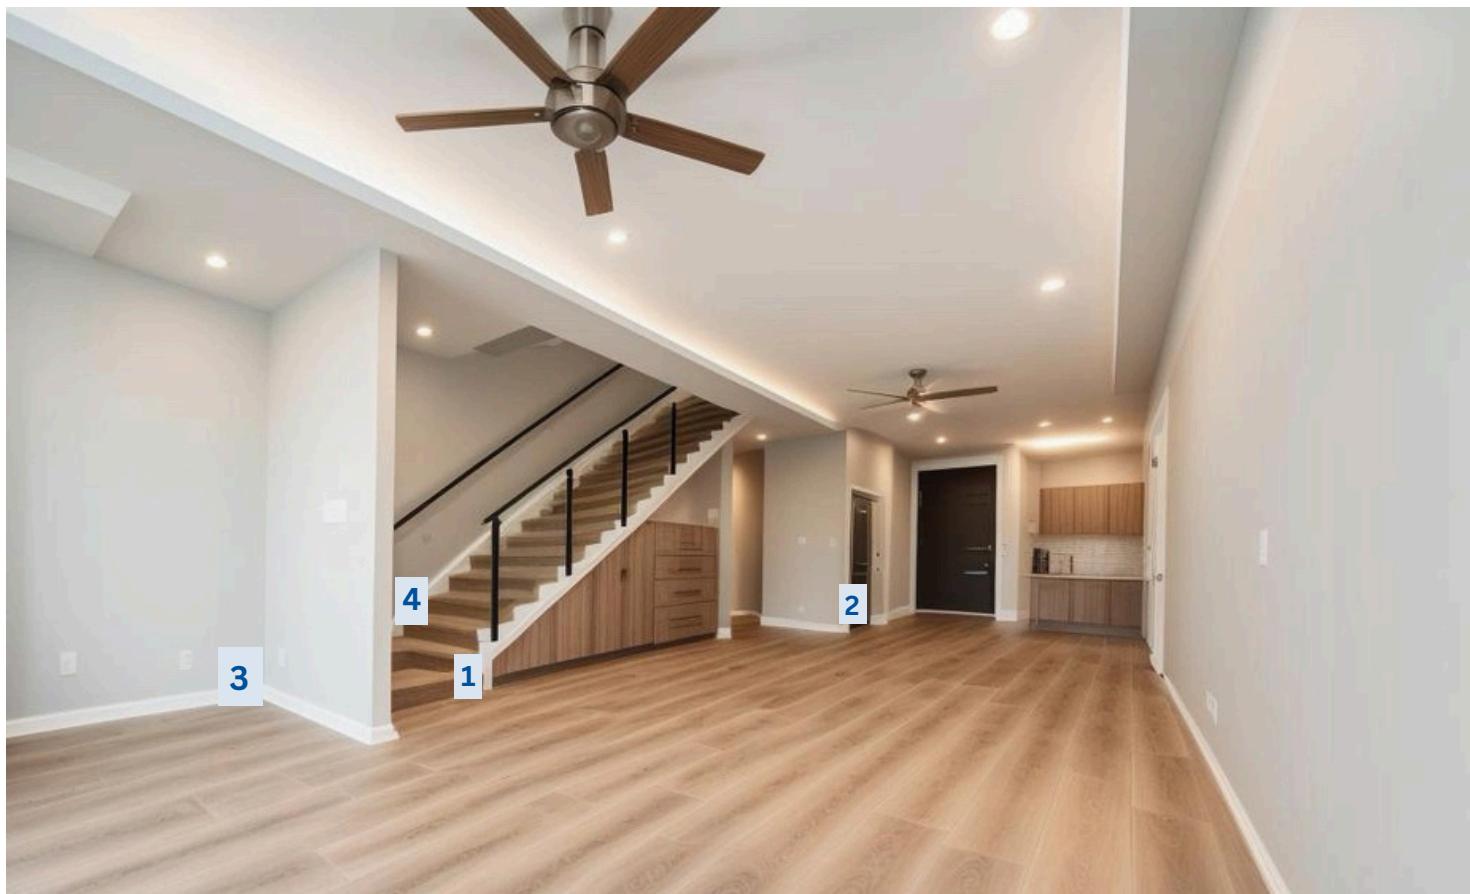

Small L Cap Profile

Small L Profile is typically used along cabinet edges or sliding door frames to secure and finish flooring installation. It provides a neat and elegant alternative for customers who prefer not to use silicone.



Adaptation (A - Profile)

To transition new floor to existing floor that is different in heights. This is used when you have two areas with new and existing floor.



Transition (T-profile)

Connecting two areas with same height flooring and hiding the expansion gap in between. Comes with a PVC track, glue it down and snap the profile on it.



Skirting

To cover the expansion gap around all sides of walls with matching colour, protect from damage such as scratches & knocks by foot traffic or furniture.



Big L Cap Profile

L profile is for flooring at staircase, doorway, entrance (with step up). This is to close the connection edges between floorboards.




Stairnose (Stair Nosing)

Stair Nosing functions the same as L profile, is to cover connection. Protect feet from injury. Available rounded edges.

SUB-FLOOR PREPARATION

SELF-LEVELLING

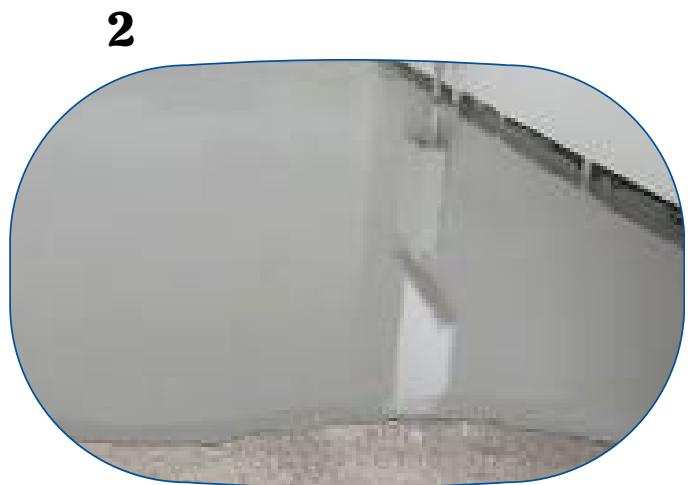

Self-levelling compound, also known as floor screed or floor levelling compound, is a critical material used to create a flat and even subfloor in preparation for the installation of upper flooring layers. It is designed to be applied over a range of uneven substrates, utilizing gravity to spread and self-level the latex-based mixture. Self-levelling compound is particularly recommended for vinyl and SPC flooring installations, especially for floors less than 5mm in thickness, when the subfloor is not perfectly level. It helps prevent visual imperfections, such as a wavy appearance, ensuring a smooth, professional finish and enhancing the overall aesthetic quality of the flooring.

PRODUCT SCORE

WATERPROOF FLOORING TYPE PERFORMANCE OVERVIEW

PRODUCT	WATERPROOF	MOISTURE POOR	TERMITE RESISTANT	HEAT RESISTANT	SCRATCH RESISTANT	STAIN RESISTANT	BATHROOM	IMPACT RESISTANT
PMFB	10	10	10	8	10	9	6	7
WPL	7	6	7	8	10	9	1	7
LVT	10	10	10	6	7	7	10	6
SPC	10	2	10	4	5	2	6	7
VINYL	4	6	10	3	4	2	1	6



WEAR LAYER THICKNESS DURABILITY PERFORMANCE (SPC & VINYL)

WEAR LAYER THICKNESS	RESIDENTIAL		COMMERCIAL		
	ALL	LIGHT	MEDERATE	HEAVY	
4 MIL (0.1MM) AC1	SUITABLE	SUITABLE	SUITABLE	SUITABLE	SUITABLE
12 MIL (0.3MM) AC2	SUITABLE	SUITABLE	SUITABLE	SUITABLE	SUITABLE
20 MIL (0.5MM) AC3	SUITABLE	SUITABLE	SUITABLE	SUITABLE	SUITABLE

Note: Wear layer durability for SPC & Vinyl is measure by number of years the flooring surface wear layer will totally worn out under normal usage condition.


PVC

Ceiling


“Lightweight. Durable. Stylish.”



PVC CEILING

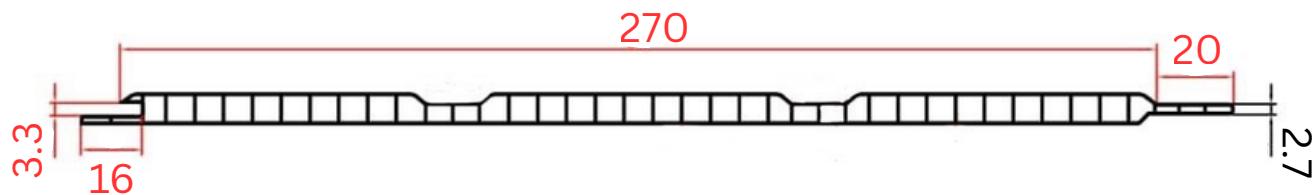

PVC ceiling panels are more durable, stable, dust-free, and maintenance-free compared to gypsum boards that require repainting and shed dust over time. They offer stylish designs with various wood patterns and colors to match any space, and are suitable for both indoor and outdoor use. When combined with Aluminium Ceiling Strips, they deliver long-lasting durability, elegant aesthetics, and effortless maintenance – making them the best alternative to traditional gypsum boards.

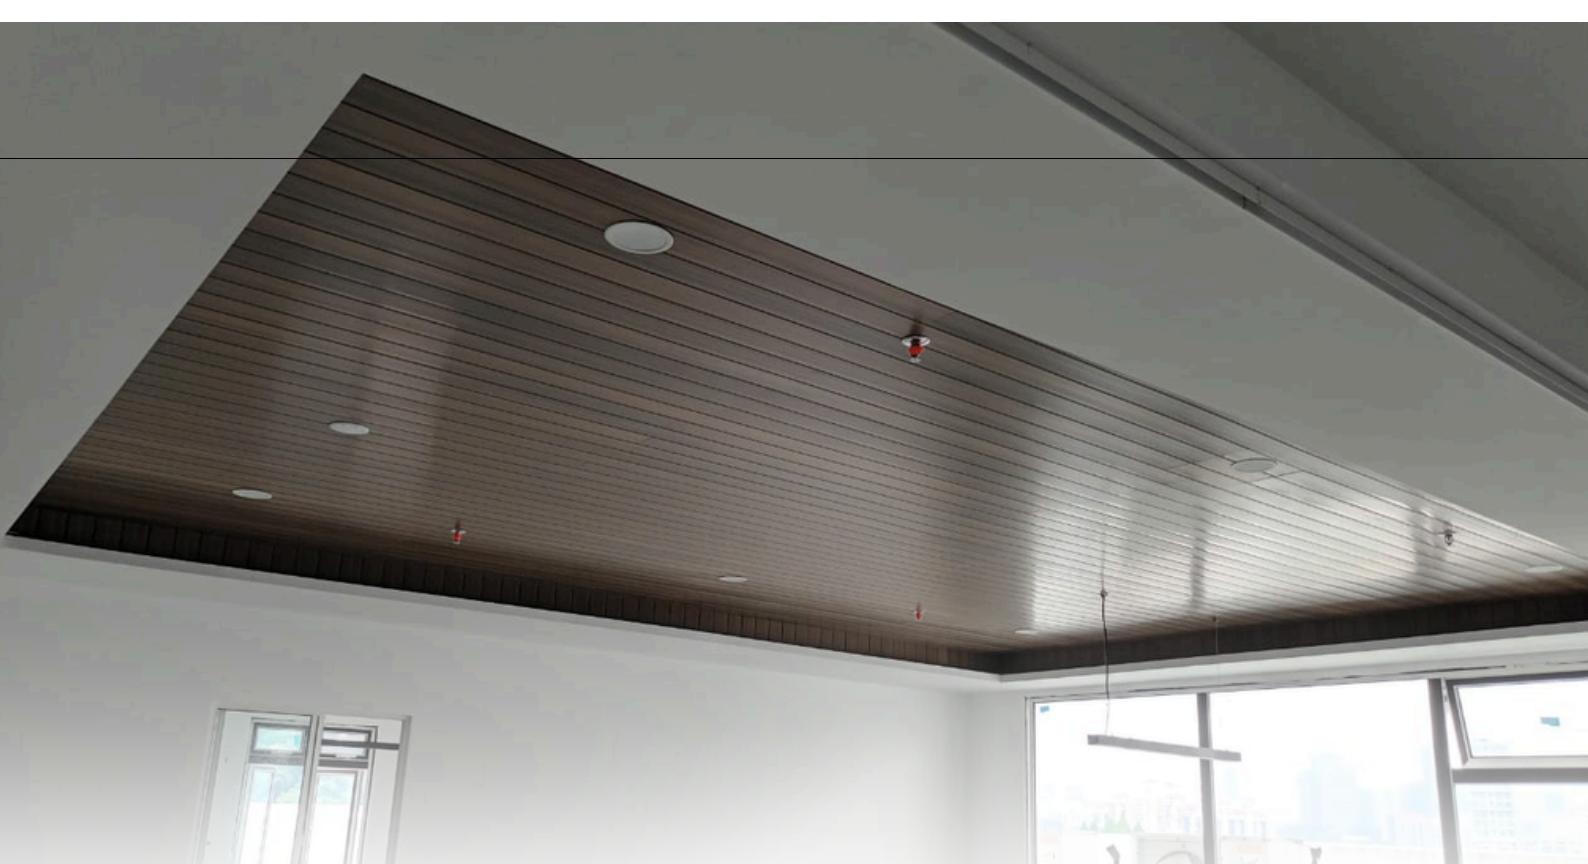


Model: CP3009

Surface: Laminate

Size: 300mm x 9mm x 2400mm (8ft)

300mm x 9mm x 3658mm (12ft)

300mm x 9mm x 5950mm (19.5ft)

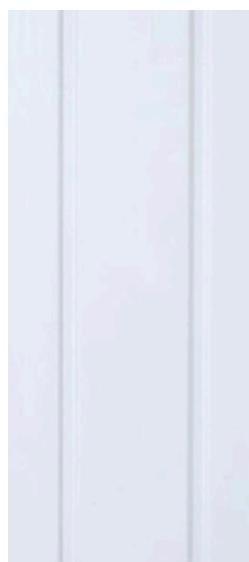


WHITE



BROWN




TEAK

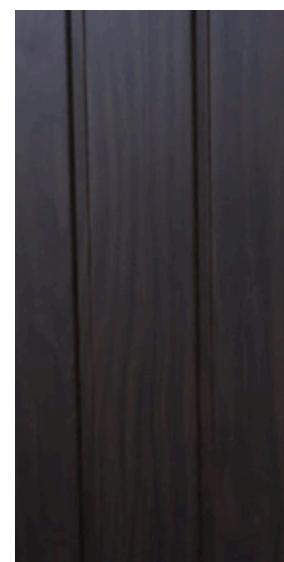

WALNUT

Aluminium

Strip Ceiling

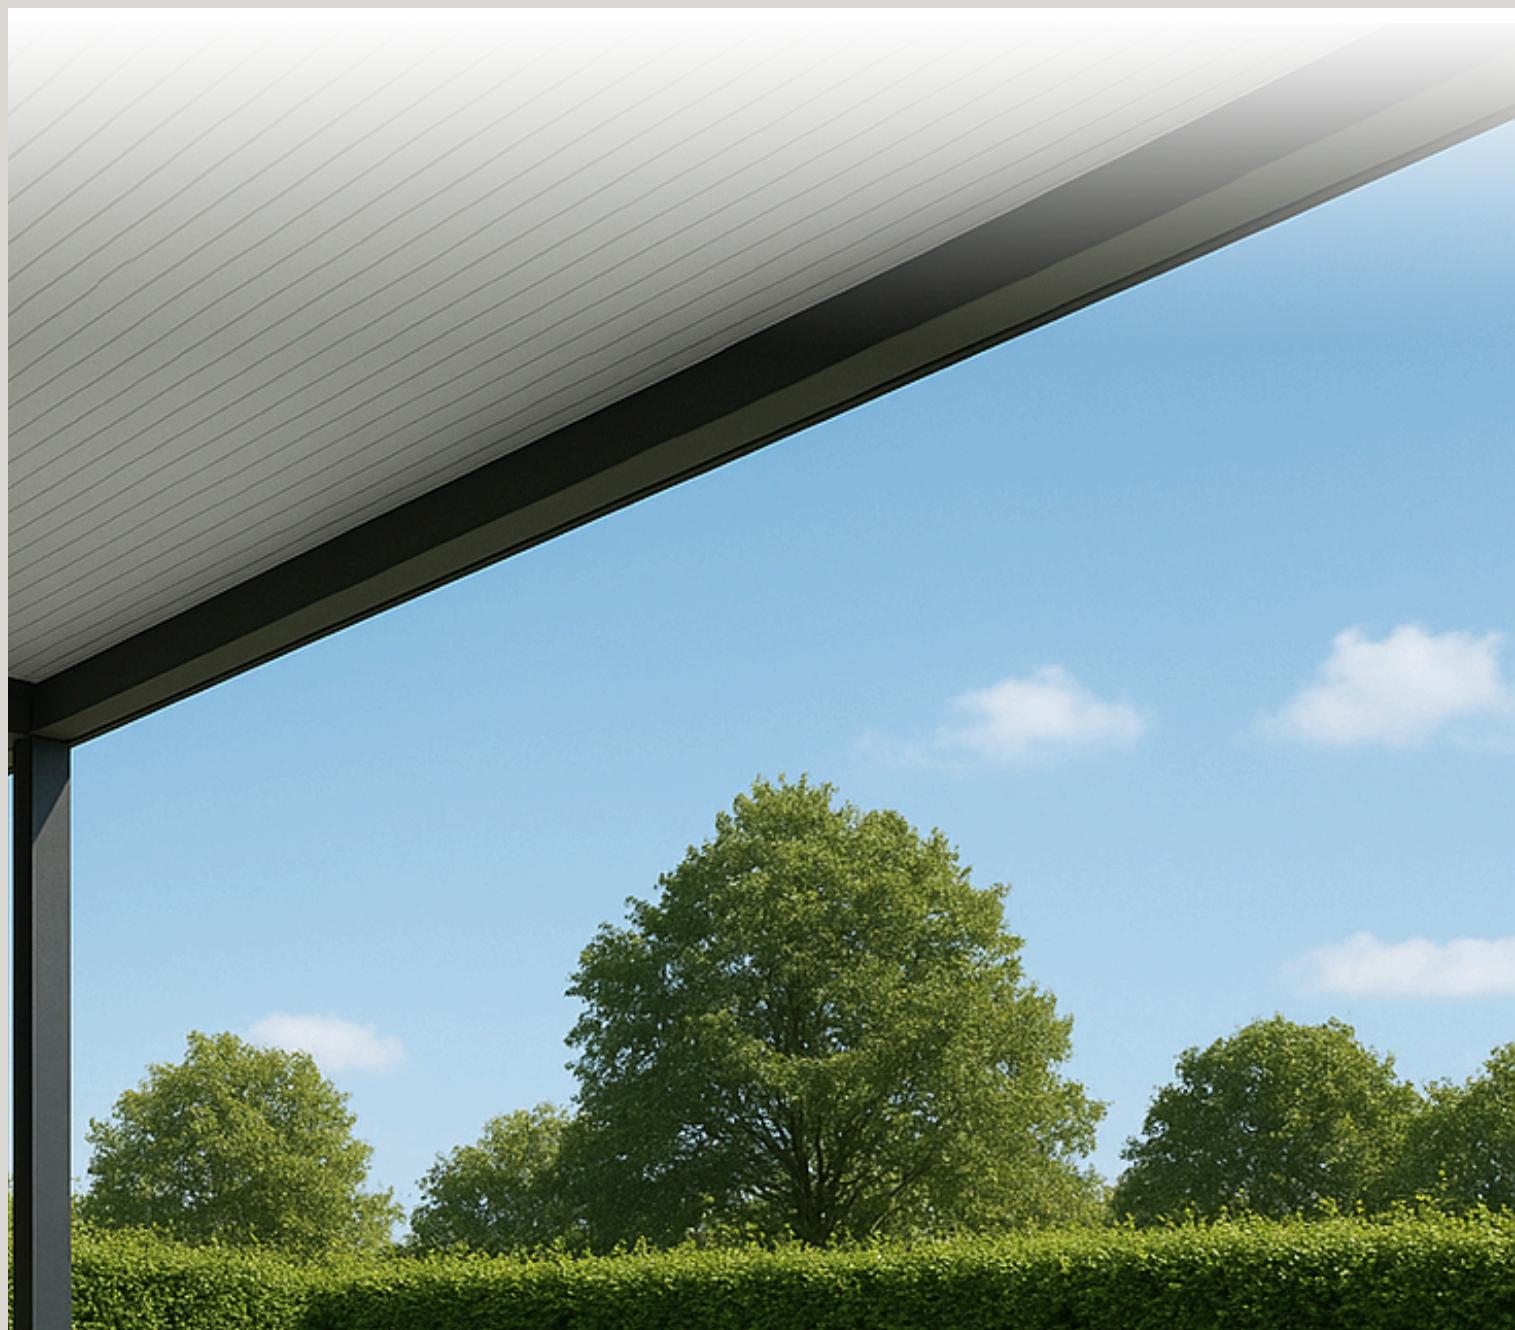


PRODUCT STRUCTURE

Aluminium Ceiling Strip


A stylish and practical ceiling solution for modern spaces. Made from lightweight yet durable aluminum, these strips are resistant to moisture, heat, and rust—perfect for both residential and commercial use. With their sleek design and easy installation, aluminum ceiling strips bring a clean, contemporary look while ensuring long-lasting performance with minimal maintenance.

Installation plan


TYPICAL INSTALLATION PLAN FOR STRIP CEILING




Typical installation plan for strip ceiling with Multi Carrier




Cross view of panel

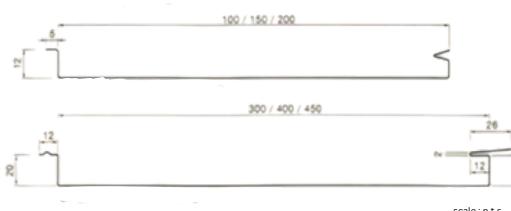


Multi Carrier joint detail




Typical Detail at Bottom STRIP Facades to floor





Typical Gable End of ceiling type



Typical Detail joint using Panel Joint




Typical Detail at Bottom STRIP Facades

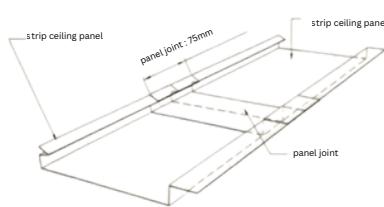



TYPE : 100S
THICKNESS : 0.5MM
MATERIAL : ALUMINIUM


TYPE : 100G
THICKNESS : 0.5MM
MATERIAL : ALUMINIUM



WG 870



WG 990



WG 950

WPL

FLOORING

WOOD PLASTIC LAMINATE

Strong. Stylish. Sustainable.



Product Structure

WOOD PLASTIC LAMINATE (WPL)

Wood Plastic Laminate (WPL) flooring is an advanced flooring material made by combining wood fibers and plastic resins. This fusion creates a durable core that is more resistant to moisture and termites compared to traditional laminate flooring. The 8mm thickness provides stability and comfort underfoot, while the decorative top layer delivers a natural wood appearance. WPL flooring is designed with a click-lock system, allowing for easy installation without glue or nails.



Size	Thickness	Wear Layer	Packing	Area Suitability
1220 x 180mm	8MM	0.3-0.5MM	8 pcs / 20 SF	Residential & Light Commercial

Stain Resistant	Slip Resistant	WaterProof	Scratch Resistant	Noise Reduction
Fire Retardant	Termite Proof	Impact Resistant	Easy To Clean	Affordable



SIZE : 1220mm x 196mm

THICKNESS : 8mm

MATERIAL : 100% VIRGIN

WEAR LAYER : 0.3 MM

PACKING : 8PCS / 20.6 SF (CTN)

JOINT SYSTEM : INTERLOCKING

AREA SUITABILITY : INDOOR RESIDENTIAL UP TO
HEAVY COMMERCIAL AREA



6604



6609



6607



6601



6608



6603



6169



6606

Fluted

PANEL

“Style That Lasts, Quality That Shows”




PRODUCT STRUCTURE

FLUTED PANEL

Fluted panels are modern wall cladding solutions designed to bring texture and elegance into interior spaces. They are made from PVC or WPC composites, giving them high resistance to moisture, termites, and fire. The vertical grooves create a 3D effect that adds depth and sophistication to walls and ceilings. Besides aesthetics, fluted panels also improve acoustic performance by reducing noise, making them suitable for both homes and offices.




FLUTED PANEL

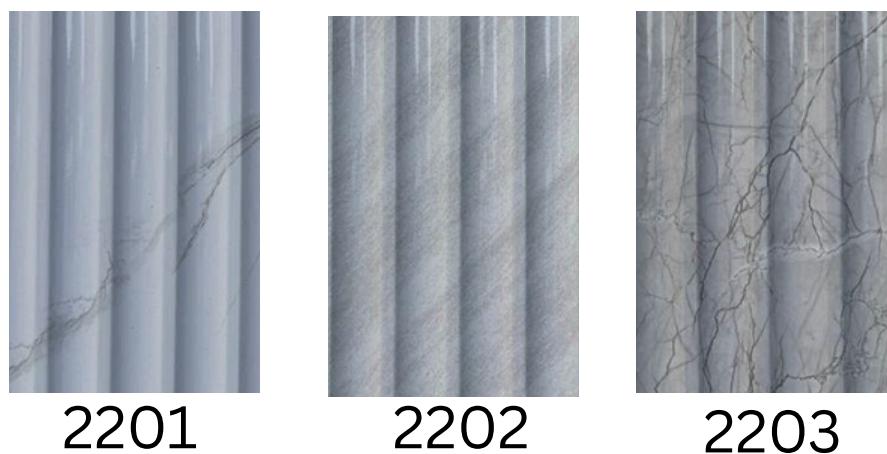

T-SERIES

SOLID SKIRTING

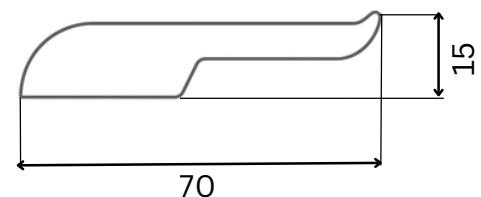

Solid Skirting – Stronger, Matching, and More Durable

Many hollow PVC skirtings may be lightweight, but they are fragile and tend to crack or break over time. In contrast, solid skirting provides clear advantages:

1. Stronger and More Durable

With a solid structure, it is sturdier and less likely to break compared to hollow skirting, ensuring long-lasting performance.

2. Perfect Match with Flooring

Our solid skirting is designed to match the exact color and style of LVT click flooring, achieving a seamless and elegant finish.

Customers often focus only on choosing the flooring itself, while overlooking the durability of accessories. At Asia Wood, we pay extra attention to these details, carefully crafting even the skirting, so that our customers enjoy peace of mind after installation – worry-free and hassle-free.

Choosing solid skirting means choosing strength, durability, and perfect harmony with your flooring.

D-SERIES

HOLLOW SKIRTING




101



102



103



104



105



113



106



107



109



110



112

Hollow Skirting – Lightweight, Cost-Effective, and Flexible

Alongside solid skirting, we also offer hollow skirting, giving customers more choices. The benefits of hollow skirting include:

1. Lightweight and Easy to Install

The hollow structure makes it lighter, easier to carry, and faster to install during construction.

2. Cost-Effective

Compared to solid skirting, hollow skirting is more economical, making it ideal for projects with tighter budgets or large-scale installations.

3. Variety of Styles

Available in a range of colors and designs, it can be matched with different flooring styles to create a consistent and elegant look.

At Asia Wood, we understand that every customer has different needs. That's why we provide both solid and hollow skirting. Hollow skirting is the perfect option for those who value affordability and convenience while still achieving a clean finishing touch.

VENTILATION

LOUVERS




TYPE : 85 L/7V
THICKNESS : 0.5MM
MATERIAL : ALUMINIUM

The semi-round profile panel is designed with a lightweight clip-on bracket system, offering durability with minimal maintenance. It can be applied to both interior and exterior designs. The concealed bracket ensures a clean finish without visible marks on the panels. Available in aluminums, the panels come with either plain polyester finishes or powder coating treatments.



SILVER 028

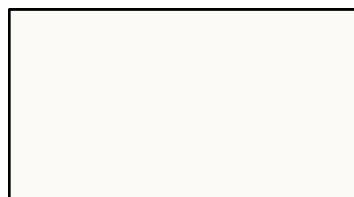

RAL 9010



BRONZE 303